

IT'S NOT JUST A FRAME – IT'S A FULL INSTALLATION SYSTEM.

FusionFrame: A one-of-a-kind alternative to composite or wood jambs, utilizing the strength of an LVL interior, the rot-proof performance of a FrameSaver® bottom, and the durability of a composite frame exterior. Offering a lifetime limited warranty*



FLOATING BRICKMOLD

Even if your walls aren't plumb, your door unit can be. With ¼" of "float," the floating brickmold adjusts to fit your needs.

Remove covers, install fasteners and reattach covers for a flawless, clean install.



PLUMB INDICATOR

Removable frame stop cover allows for concealed plumb indicator and fasteners.

- Installation made easy
- Removable frame and brickmold covers
- Eliminates unsightly fastener holes



INSTALLATION HOLES

Pre-drilled holes in frame for ease of installation.



ULTIMATE FLEXIBILITY

Get ultimate flexibility between 4⁹/₁₆" and 8⁹/₁₆" frame widths.



COMPOSITE BOTTOM

Prevents water absorption, warping and rotting.



SMOOTH

PRE-FINISHED, MAINTENANCE-FREE

Available as a textured or smooth frame, providing you with the benefit of a pre-finished, maintenance-free system, along with the beauty of a stain or paint finish that matches your entry door.

- Smooth Frame is factory finished and available in all paint finishes
- Textured Frame is factory finished and available in all paint, stain, and glazed finishes




TEXTURED



* Refer to full warranty for limitations.
Not available for outswing doors.

ProVia FusionFrame® Program

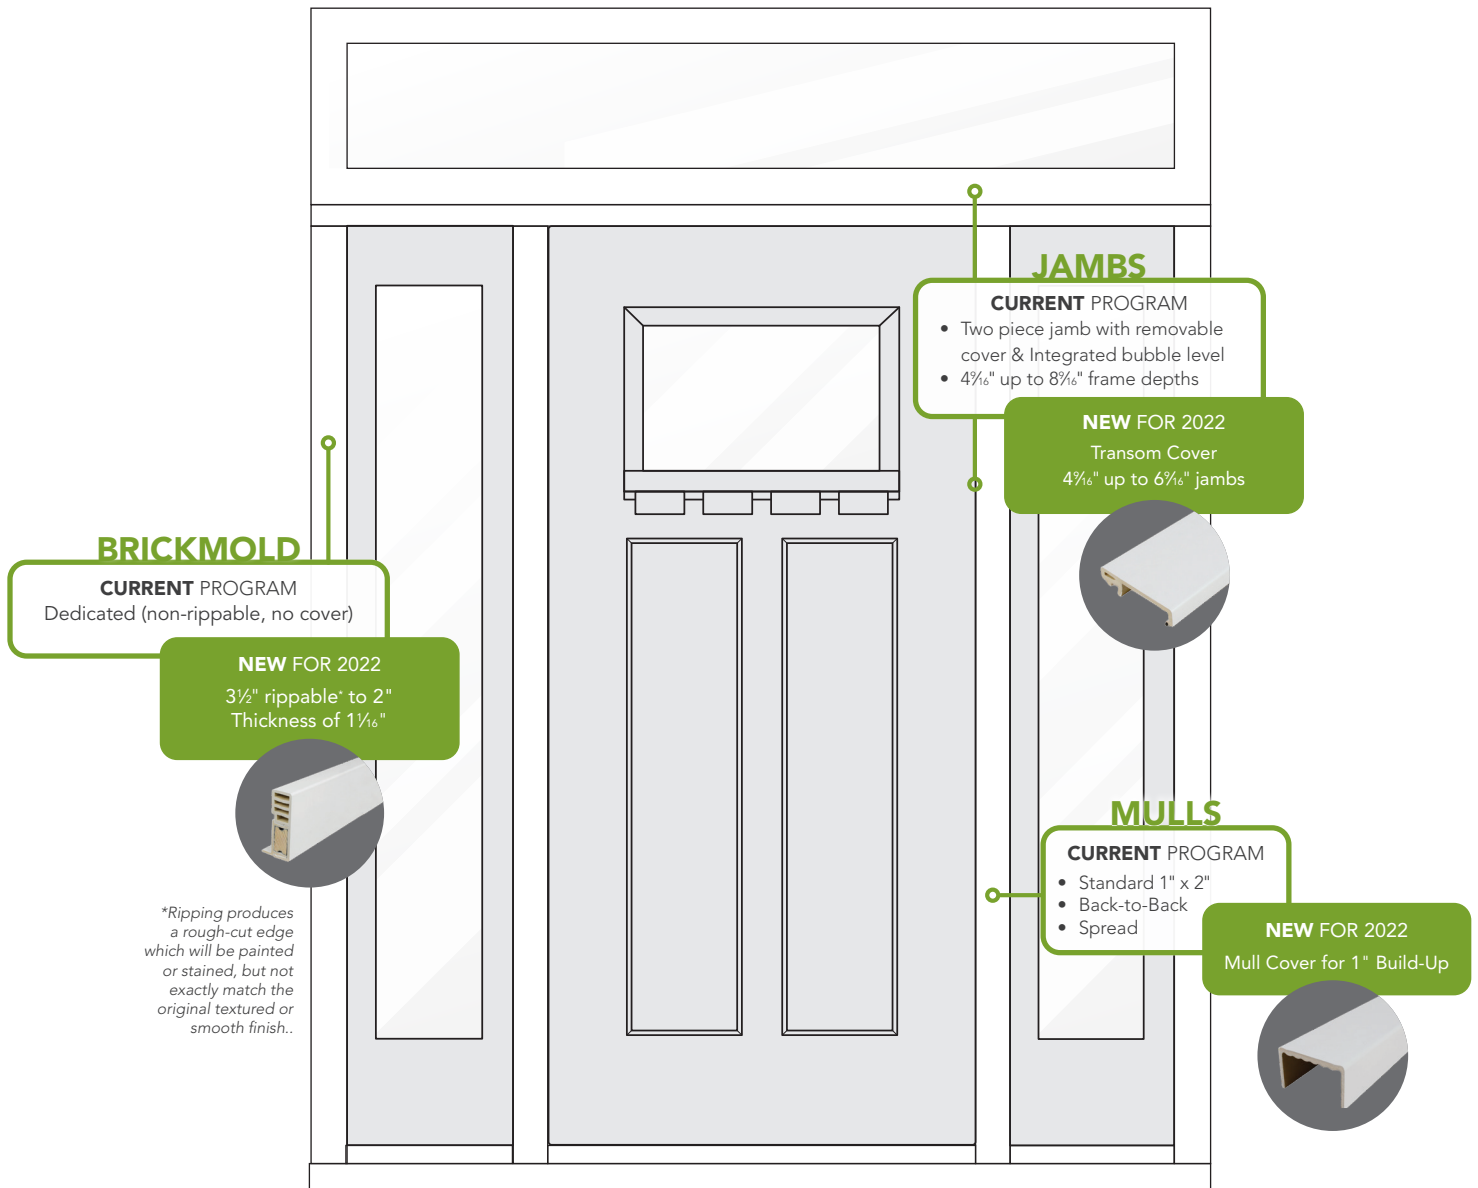

Mull Frame Depth rules:

Standard Mull

(No Mull Width Adjustment Requires Customizing Sidelite Width)

Perimeter Frame Depth

- 4⅞"
- 4⅞" - 6½"
- 6⅞"
- 6⅞"-8⅞"

Inner Frame Depth Options

- Match Outer Frame Depth
- 4⅞" Inner Frame Depth
- Match Outer Frame Depth
- 6⅞" Inner Frame Depth



Standard

Spread Mull

(Mull Width Can Be Adjusted)

Perimeter Frame Depth

- 4⅞" - 5½"
- 5⅞" - 6½"
- 6⅞"
- 6⅞" - 7½"
- 7⅞" - 8⅞"

Inner Frame Depth Options

- Match Outer Frame Depth
- 5½" Inner Frame Depth
- Match Outer Frame Depth
- 6⅞" Inner Frame Depth
- 6⅞" Inner Frame Depth or 7½"



Spread

